




# QUICKSEAM & QUICKSEAM PLUS™



Popular for upscale residential and architectural applications, Quickseam and Quickseam Plus are manufactured to be attractive and durable. Both are snap-locking, concealed fastened products that offer 16" coverage. And as the manufacturer, Mansea Metal will custom cut the panels to your exact specifications, saving you valuable installation time and money.

# QUICKSEAM & QUICKSEAM PLUS™

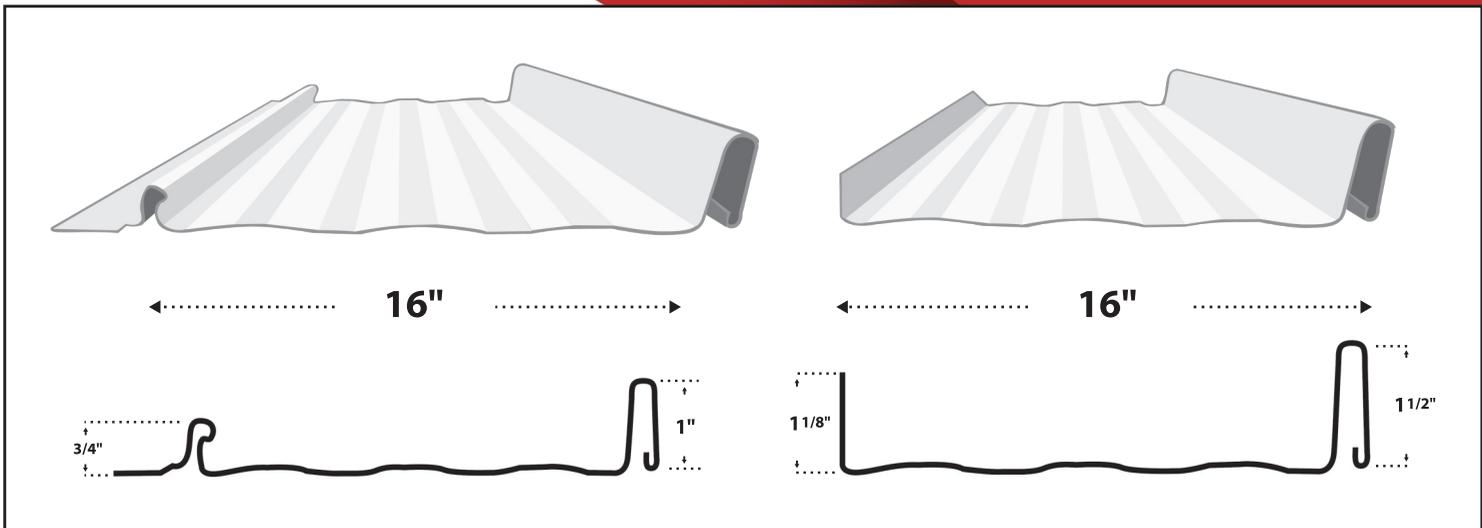

## GENERAL INFORMATION (BOTH)

**Slope:** Minimum recommended roof slope is 3:12.

**Coverage:** 16" coverage width.

**Length:** Minimum cut length is 1'-0". Maximum recommended cut length is 53'-0". Longer panels need special consideration for erection, packaging, and shipping.

**Substructure:** Designed for use over a solid substrate. Uniform and properly aligned substructures are necessary to avoid panel distortion.

**Gauge:** Available in 26 gauge and 24 gauge in Galvalume and Sherwin-Williams® WeatherXL colors.

**Fasteners:** Quickseam and Quickseam Plus are concealed fastened, snap-lock products. Contact your representative for assistance in choosing the proper fastener for your project.

\*All panels are subject to surface distortion when fasteners are improperly applied. Fasteners that are over-driven will cause stress across the face of the panel at or near the point of fastening.

- 16" coverage
- Exceptional durability
- Galvalume substrate with 25-year warranty
- Can be installed horizontally or vertically
- Multiple, vibrant Sherwin-Williams® color options 40-year limited warranty
- Complete line of accessories
- Minimum roof slope – 3:12
- Installs over solid decking with 30# felt paper on new and existing roofs
- Concealed fastened, snap-lock panel



**MANSEA  
METAL**  
www.ManseaMetal.com

### Kentucky

925 Rolling Hills Lane  
Winchester, KY 40391  
Phone: (859) 744-4475  
Fax: (859) 744-4324

### N. Kentucky

13113 Apex Dr.  
Walton, KY 41094  
Phone: (859) 485-1928  
Fax: (859) 485-1083

### Illinois

1181 State Route 121  
Mt. Zion, IL 62549  
Phone: (217) 864-5835  
Fax: (217) 864-2297

### Ohio

4799 Salem Ave.  
Dayton, OH 45416  
Phone: (937) 503-2457  
Fax: (937) 275-9812