


HI-RIB






Ideal for low-sloping roofs, from agricultural to commercial or even residential applications, Hi-RibTM has all your projects covered. This 26 gauge product has a 36" coverage and a 39" formed width that can be installed horizontally or vertically. The Sherwin-Williams® Weather XL finish carries a 40-year limited warranty in a variety of colors.

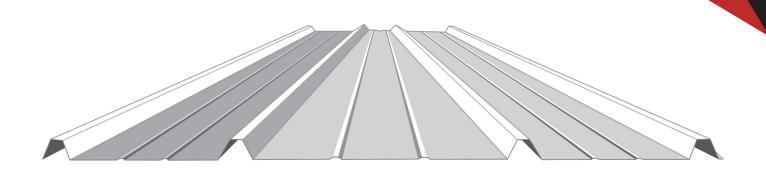



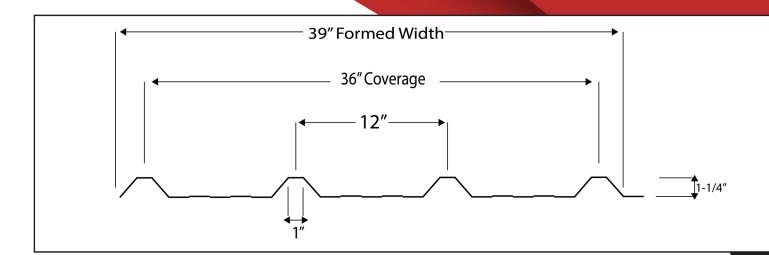

GENERAL INFORMATION

Slope: Minimum recommended roof slope is 1/2:12.

Coverage: Available in a 1-1/4" rib height with a 36" coverage and 39" formed width.

Length: Minimum cut length is 3'-0". Maximum is 53'-0". Longer panels need special consideration for erection, packaging, and shipping.

Substructure: Designed for use over a solid substrate or open structural framing. Uniform and properly aligned substructures are necessary to avoid panel distortion.

Gauge: Available in 26 gauge in Galvalume, Sherwin-Williams® colors, and Kynar finishes.

Fasteners: Exposed fastened. Contact your representative for assistance in choosing the proper fastener for your project.



*All panels are subject to surface distortion when fasteners are improperly applied. Fasteners that are over-driven will cause stress across the face of the panel at or near the point of fastening.

- 36" coverage and 39" formed width
- 1-1/4" rib height with 12" increments
- 12" rib spacing
- Painted Galvalume and Mill Finished Galvalume Plus substrate with 25-year warranty
- Multiple, vibrant Sherwin-Williams® color choices and Kynar finishes with 40-year limited warranty
- Complete line of accessories
- Minimum roof slope 1/2:12
- Installs over open or solid substrate
- Can be installed horizontally or vertically.



Kentucky

925 Rolling Hills Lane Winchester, KY 40391 Phone: (859) 744-4475 Fax: (859) 744-4324

N. Kentucky

13113 Apex Dr. Walton, KY 41094 Phone: (859) 485-1928 Fax: (859) 485-1083

Illinois

1181 State Route 121 Mt. Zion, IL 62549 Phone: (217) 864-5835 Fax: (217) 864-2297

Ohio

4799 Salem Ave. Dayton, OH 45416 Phone: (937) 503-2457 Fax: (937) 275-9812